

FIG. 1

0073402 10000

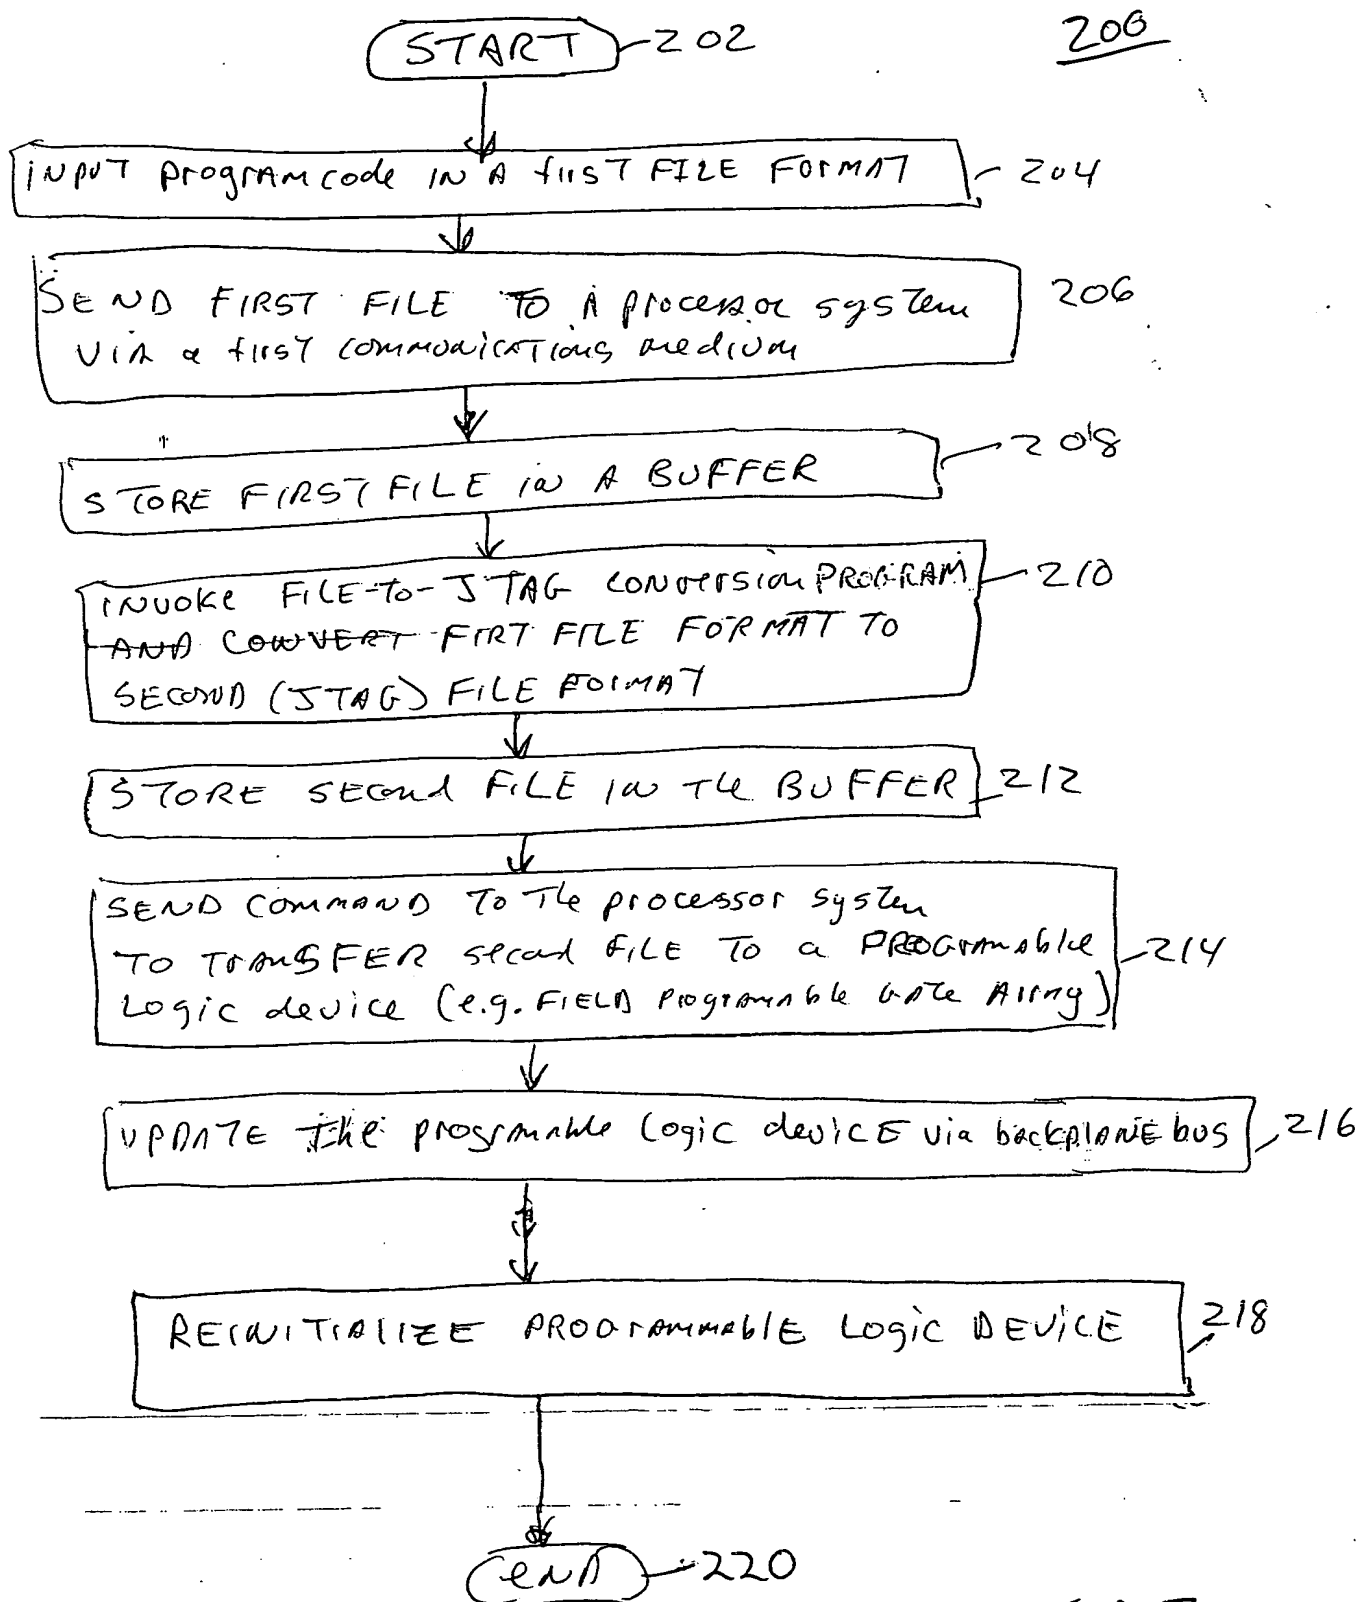


FIG. 2

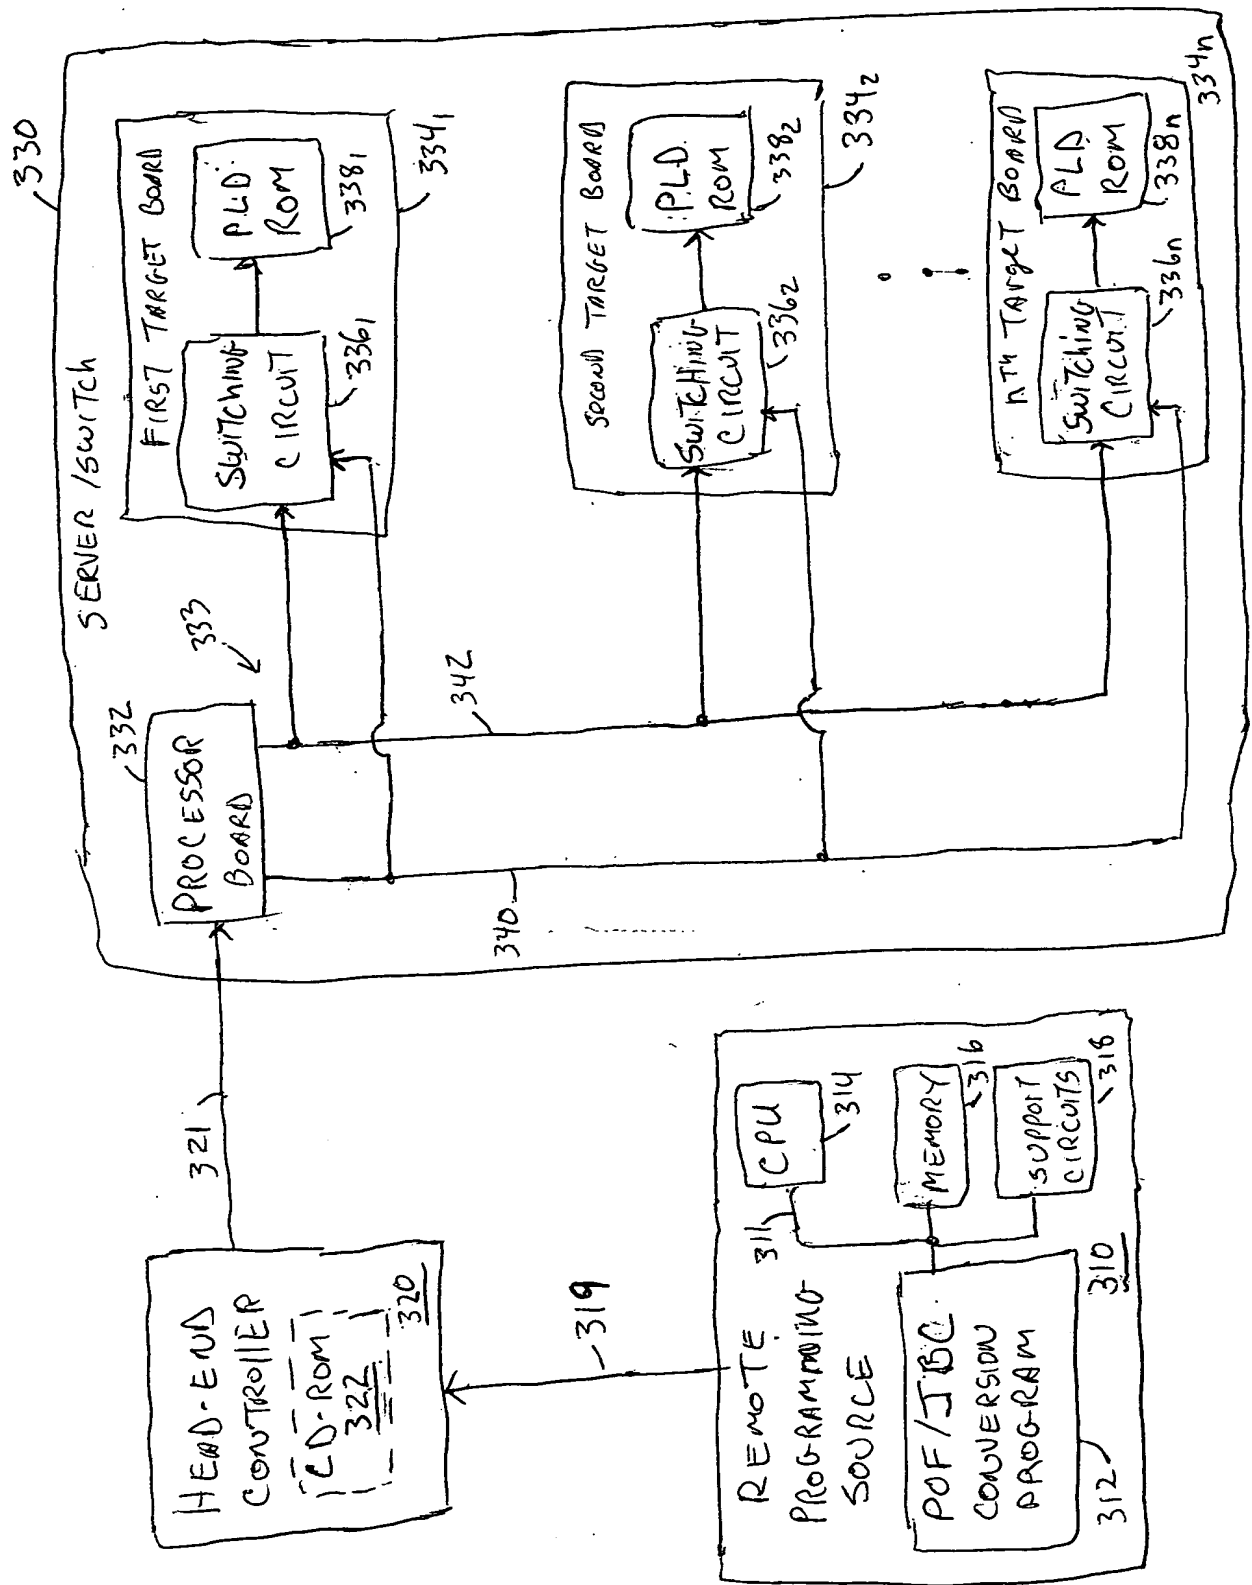


FIG. 3

GENERATE PROGRAMMER
OBJECT FILE (POF) 402

CONVERT POF TO JAM
BYTE CODE (JBC) FILE 404

TRANSFER JBC FILE
TO HEC VIA A FIRST
COMMUNICATIONS PATH 406



RECEIVE JBC FILE 408

TRANSFER JBC FILE
TO
THE SERVER VIA A
SECOND COMMUNICATIONS
PATH 410

PROCESSOR SYSTEM RECEIVES
JBC FILE 412

TO STEP 414

FIG. 4A

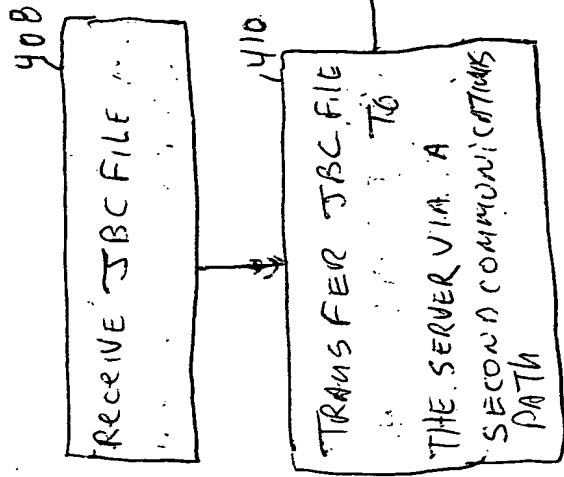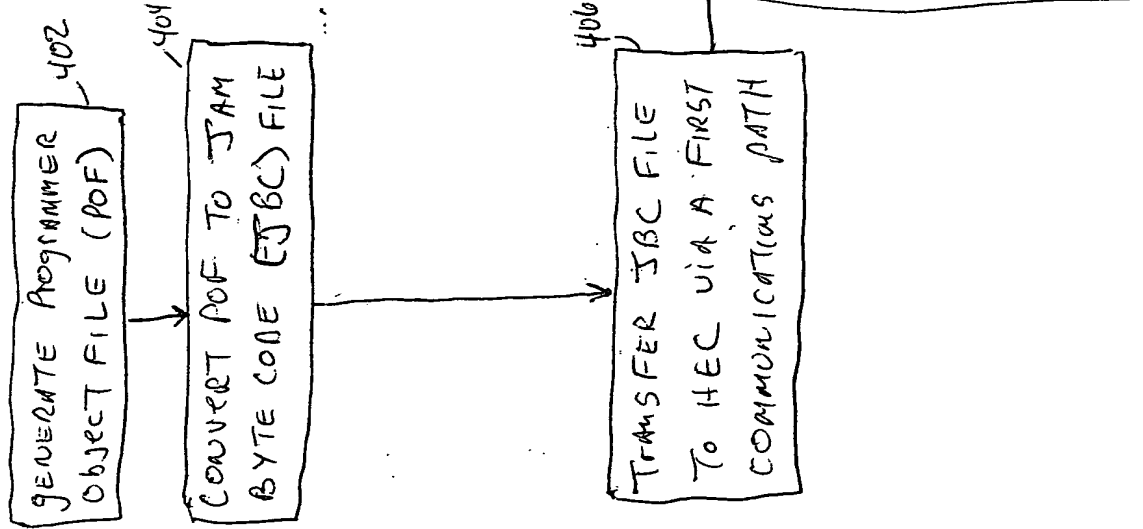

PLD ← 338 400

334 Circuit Boards having PLD's

SERVER-330

FROM STEP 412

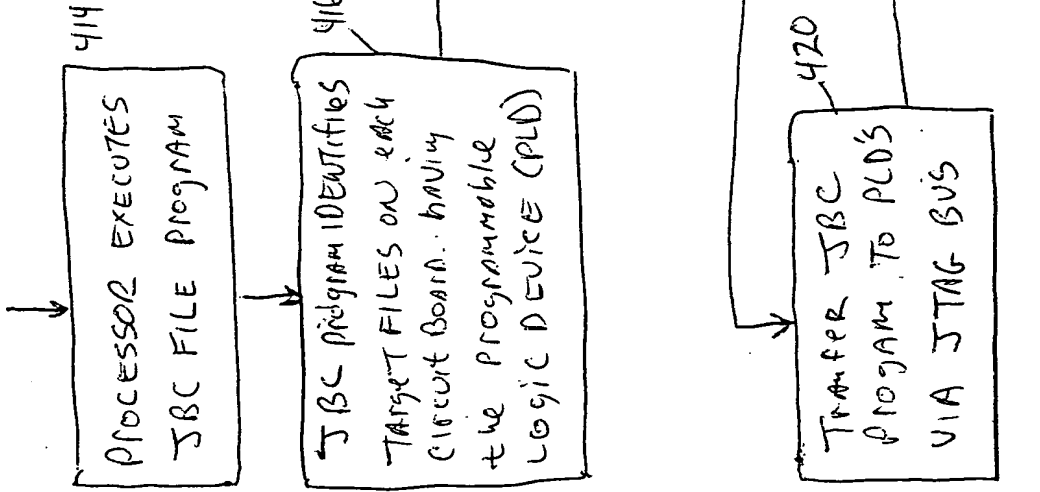


FIG. 4B